

# SENSE COMBI

## Application

Chilled & unchilled vending

## Market

Hotels, Hospitality, Gyms, Offices, Unmanned Retail


## Purpose

Provide both chilled and unchilled items your customers desire through the SENSE Combi. You can now serve your customers at any time and at any location you want.



# SENSE COMBI

## Technical drawing

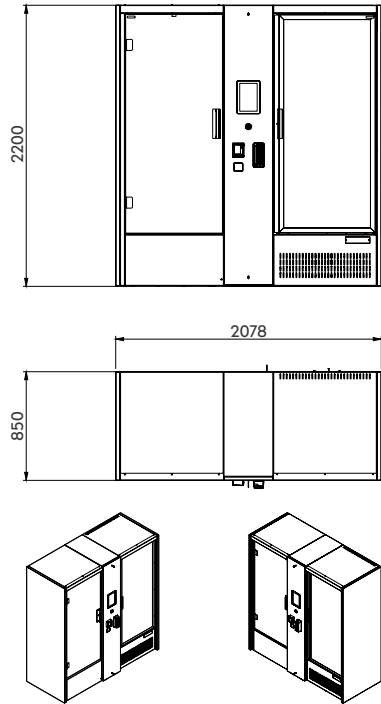

### Pan Oston B.V.

**Address** Hertzstraat 1  
8102 PK Raalte  
The Netherlands

**P.O. Box** P.O. Box 222  
8100 AE Raalte  
The Netherlands

**Phone** +31 572 35 77 55

**Email** info@panoston.nl

**Website** panoston.nl

## Product specs

Type	Specification
Storage capacity	Max. 200kg per pantry
	Max. 20kg per shelf segment
	Up to 300 bottles of 500ml per pantry
Number of shelves	10
Number of shelf segments	30 product facings
No. Of doors	2
Glass	Hardened glass
Colour coating	Powder coated. Every RAL colour is possible
Dimensions - inside	1x 800 Liter + 1x 700 Liter
Power Supply	230 VAC - 50/60Hz internally
Power Consumption - Typical*	t.b.d.
Power Consumption - Maximum*	t.b.d.
Net weight*	530 kg

*\*Indicative weight only. Exact figure depending on configuration and accessories*

## Fridge specs

Refrigerant gas	Eco Friendly R290
Cooling capacity	K4: +1.0°C / +9.0°C

## Hardware specs:

Type	Specification
Sensor technology	Load cells
	Cameras
Screen	10 inch, 1280 x 800 (16:10), PCAP - 10 Point Touch
PC - Media player	On request
PC - AI Server (W x H x D)	AI Server is not included Max. dimensions: 235 x 700 x 593 mm
Speakers	10W
Scanner	Optional: Newland FM3080
ID Checker	Optional
Pin & Chip	Feig cVEND
	Worldline Valina
	Verifone UX700
	Others on request
LED Technology	White 6500K, RGBW
LED Dimmable	Optional

## Environmental conditions

Fridge - Climate Class	CC2
Operating Temperature	+16°C to +32°C
Storage Temperature	-10°C up to 50°C
Operating Humidity	20% up to 65% non-condensing
Storage Humidity	20% up to 60% non-condensing

## Installation requirements

Flatness floor	NEN-2747 Class 3
Pressure on floor	Max. 1500 kN/m2